

## HR12390W

Valve-regulated lead-acid battery



# HIGH RATE

## SERIES


### Characteristics

Nominal voltage	12V (6 cell per unit)	
Nominal power at 15 min. rate 1.67V/cell (25°C)	390W	
Capacity (25°C)	10 Hours rate/10.8V	100Ah
	5 Hours rate/10.8V	91.5Ah
Terminal type	T16	
Torque	12.3±2.5N.m	
Approx. internal resistance (25°C)	4.0 mΩ	
Dimensions	Length	330±2mm (12.99inch)
	Width	171±2mm (6.73inch)
	Height	214±2mm (8.43inch)
	Total height	220±2mm (8.66inch)
Design Life (stand-by)	JIS at 25°C	10 years
	Eurobat at 20°C	10-12 years
Weight	32.70kg (72.10lbs)±3%	
Nominal operating temperature	25±3°C (77°F±5)	
Operating temperature range	Discharge	-15°C~50°C (5°F~122°F)
	Charge	-10°C~50°C (14°F~122°F)
	Storage	-20°C~50°C (-4°F~122°F)
Float charging voltage at 25°C	13.5V~13.8V	
Cyclic charging voltage at 25°C	14.5V~15.0V	
Temperature compensation	Float charge	-18 (mV/°C/Block)
	Cycle charge	-30 (mV/°C/Block)
Max. charging current (A)	31.2A	
Max. discharge current for 5 seconds	800A	
Self discharge rate (25°C)	≤3%/month	
Battery container ABS UL94-HB	V-0 optional	

### Overview

NPP Power High Rate series batteries are specially designed for applications that require high power output. With their high-power density and low internal resistance, the HR series are the right choice for your most demanding applications.

### Dimensions & Terminal Type (mm)

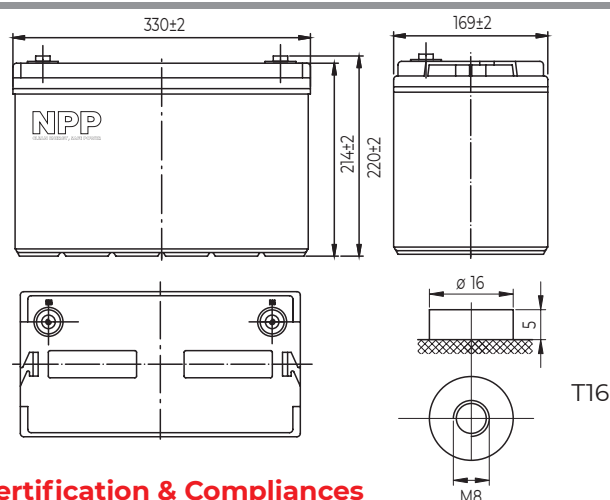

### Certification & Compliances



Compliant to: EUROBAT, RoHS, WEEE's and Reach.  
Manufactured according to IEC 60896-21 / 22

### Construction

Component	Positive Plate	Negative plate	Container	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS (V-0 opt.)	AGM	Sulfuric Acid	Rubber	Copper

### Constant current discharge characteristics at 25°C

(Ampere/cell)

F.V/Time	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h	6h
1.60V/cell	302.94	216.38	180.63	132.48	95.18	71.80	38.40	27.50	22.20	19.30	16.50
1.67V/cell	288.68	210.14	173.06	127.99	92.15	70.00	38.00	27.30	22.00	19.10	16.30
1.70V/cell	281.56	203.90	169.81	125.74	90.42	68.90	37.80	27.20	21.90	19.00	16.30
1.75V/cell	269.68	196.62	163.32	123.50	88.26	67.60	37.20	27.00	21.70	18.90	16.20
1.80V/cell	254.23	186.21	154.67	117.88	85.01	65.50	36.30	26.20	21.10	18.30	15.70

### Constant power discharge characteristics at 25°C

(Watts/cell)

F.V/Time	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h	6h
1.60V/cell	527.91	410.04	341.61	251.28	183.86	139.00	74.80	54.20	43.70	38.20	32.70
1.67V/cell	503.66	390.00	327.82	243.56	177.37	135.00	74.20	53.70	43.30	37.80	32.40
1.70V/cell	490.43	385.56	321.45	239.16	174.12	133.00	73.70	53.50	43.10	37.70	32.20
1.75V/cell	469.49	372.30	309.78	232.54	169.80	130.00	72.60	53.20	42.80	37.40	32.00
1.80V/cell	443.04	352.92	293.87	224.83	164.39	126.00	70.80	51.60	41.50	36.30	31.10

The above characteristics represent average values and can be obtained within three charge and discharge cycles. The batteries must be fully charged before testing. The data in this document is subject to change without notice and become contractual only after written confirmation. Please contact NPP Power for the latest available version.

#### NPP Power (Vietnam) Co.,Ltd

Lot A22.3, Road C4, Thanh Thanh Cong Industrial Zone,  
An Hoa Village, Trang Bang District, Tay Ninh Province,  
Vietnam

#### Guangzhou NPP Power Co, Ltd.

No.67 Lianglong Road, Huashan Town, Huadu District,  
Guangzhou, China  
Email: info@nppower.com.cn Tel. +86 20 37887 390